



THANK YOU FOR PURCHASING A YOLI INSTANT CANOPY!

Please carefully review the following instructions and familiarize yourself with parts included and how to operate your YOLI canopy. Reference parts list for names of each part noted in instructions.

SUNSET 170 10'x10' INSTANT CANOPY SETUP & TAKE DOWN INSTRUCTIONS

Parts Included: Canopy frame (1), Canopy top with dual awnings (1), Canopy vent tops (2), Steel shock cord poles (2), Steel shock cord bag (1), Wheeled carry bag (1), Stakes (4)

SECURING THE CANOPY TOP TO THE FRAME

- 1 Take temporary protective sleeve as pictured in **(Fig. 1A)** off and discard.
- 2 Place the canopy in the desired location **(Fig. 2A)**.
- 3 With partner, stand on opposite side of the frame. While holding the legs lift slightly off the ground taking a few steps backwards to extend frame at full arm's length as shown **(Fig. 3A)**.
- 4 Open the canopy frame to about 75% and pull the awning arms out until locks into 1st position as pictured in **(Fig. 4A)**. Drape the canopy top over the frame. Opening in the center of top accommodates canopy vent tops. Make sure long portions of canopy top are on the two sides where the awning arms are located as pictured in **(Fig. 4B)**.

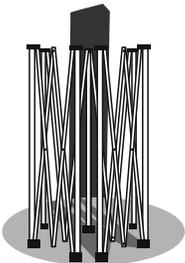


Fig. 1A




Fig. 2A

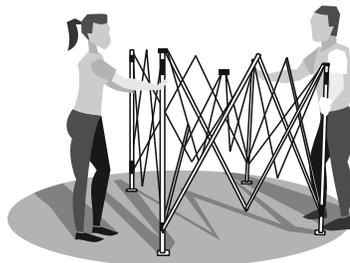


Fig. 3A




Fig. 4A

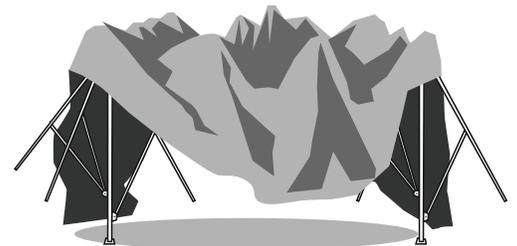


Fig. 4B

- 5 Secure top by attaching corner of the canopy top to black fastening strip **(Fig. 5A)**. Repeat for all corners.
- 6 Attach the canopy top awning to awning arms by using the elastic loop as shown in **(Fig. 6A)**. Repeat for opposite side. Unlock awning arm from 1st position by pulling on the ring pull pin. Your top is now secured to the frame.



Fig. 5A



Fig. 6A

SETUP

- 1 Place the canopy in the desired location for shade. With partner standing on the opposite side of the canopy, hold the outer legs and lift slightly off the ground stepping backwards (**Fig. 1A**).
- 2 With partner hold the top and bottom of the middle of the eaves where it makes a diamond shape as pictured in (**Fig. 2A**) lifting slightly off the ground walking backward to extend the frame. **Be careful not to pinch your fingers as the frame opens!**
- 3 Open airflow vents to the desired level by pulling up on the vent arms.
- 4 At the top of the leg, place one hand on the top corner pushing down and with the other hand just below the latch slider lifting up until it locks into position as pictured in (**Fig. 4A**).
- 5 With partner standing on the same side, lift up outer leg to slide out inner leg until the chrome push button locks into place at desired height. (**Fig. 5A**). Repeat on opposite legs. **PLEASE NOTE:** In order for the awning to work properly the canopy needs to be extended to its highest level.

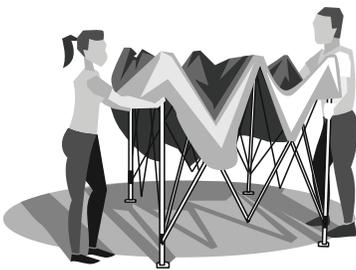


Fig. 1A

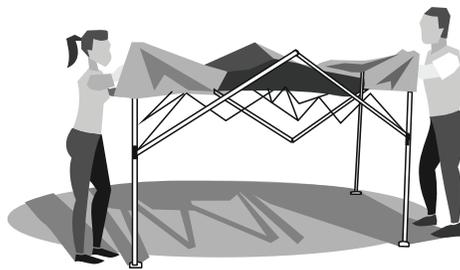


Fig. 2A

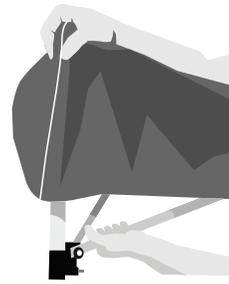


Fig. 4A



Fig. 5A

Securing Your Canopy: To harness your canopy to the ground, insert metal stakes into each foot corner. For additional stability, you can purchase from our Customer Support Center anchor weight bags designed to secure quickly to each leg for additional downforce to secure your canopy on any surface.

SETTING UP AWNING & ADJUSTING

- 1 Extend steel shock cord pole and insert the pole through the sleeve of the awning as pictured in (**Fig. 1A**).
- 2 Attach the steel pole to the awning arm with small extension as pictured in (**Fig. 2A**). The awning has three different height levels. Adjust the height by pulling the awning arm and extending to desired height. **PLEASE NOTE:** When adjusting the height of the awning make sure both awning arms are at the same level.
- 3 To lower or raise awning when it's in a locked position, pull the ring pin to unlock as shown below (**Fig.3A**)

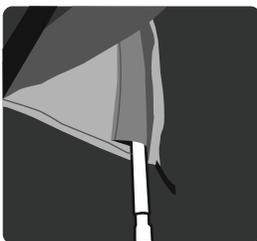


Fig. 1A



Fig. 2A

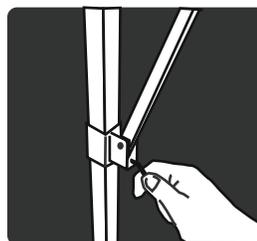


Fig. 3A

TAKE DOWN

- 1 Remove stakes securing the canopy to the ground. Position the awning to its lowest unlock position by pulling the ring pull pin (reference **Fig. 3A** under setting up awning) to lower awning arm. Make sure you maintain same height on each side as you lower awning.
- 2 Disengage steel shock cord rod from small extension on awning (reference **Fig. 2A** under setting up awning). Pull rod out of the sleeve on **BOTH** awning sides as shown in **Fig. 2A**. Fold up steel shock cord rods and store in carry bag.
- 3 Stand on the same side as your partner and in tandem push chrome button on leg to unlock inner leg. **Be careful not to pinch your fingers as you unlock inner leg.** Push inner leg into outer leg as shown in (**Fig. 3A**). Repeat on opposite legs.
- 4 At each leg pull the ring pull pin at latch slider to unlock the ceiling assembly (**Fig. 4A**). **As the ceiling unlocks be careful not to pinch your fingers.** PLEASE NOTE: make sure all latch sliders are unlocked before closing the frame. Closing the canopy frame with any latch sliders locked will cause damage to the frame.
- 5 Standing opposite of your partner hold top of the eaves and slightly lift walking slowly towards each other until about ½ way closed (**Fig. 5A**) **Be careful not to pinch your fingers as the frame closes!** Close vent arms if open.
- 6 With partner hold outer legs and walk slowly towards each other until fully closed (**Fig. 6A**). Store canopy in carry bag. Please see instructions below.

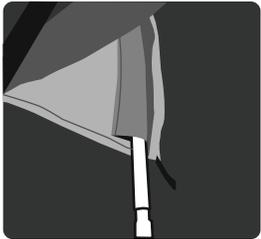


Fig. 2A



Fig. 3A



Fig. 4A

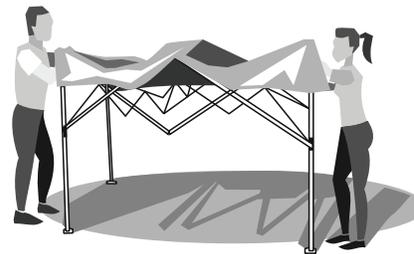


Fig. 5A



Fig. 6A

YOLI CARRY BAG INSTRUCTIONS

- 1 Close your instant canopy completely as shown in (**Fig. 1A**).
- 2 Unzip the carry bag at end and place open end of carry bag over the top of the canopy (**Fig. 2A**).
- 3 Slide carry bag down until the canopy is completely covered. Flip the bag on opposite end to close bag and zipper shut. (**Fig. 3A**).



Fig. 1A



Fig. 2A



Fig. 3A

WARNING! KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THE FABRIC TOP.
Fabric top meets the flammability requirements of CPAI-84. The fabric will burn if left in continuous contact with any flame source. The application of any foreign substance to the fabric top may render the flame-resistant properties ineffective.
This product contains TDCPP and/or TCEP, flame retardant chemicals known to the State of California to cause cancer.

© East Resource Outdoor Inc. All Rights Reserved.



QUESTIONS?

Email: yoli@answernet.com
Call: (866) 761-0070